


STANDARD CLEATS FOR PURLINS / GIRTS CONNECTION

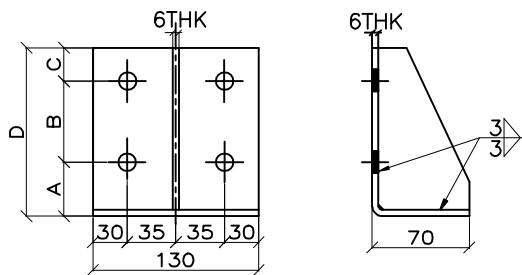

CLEAT DIMENSIONS FOR ZED SECTIONS (WITH SLEEVE CONNECTION)

SECTION DEPTH	A	B	C	D	HOLE DIA	WT./ PIECE (KG)
ZED 125	51	45	26	122	18	1.452
ZED 150	51	70	26	147	18	1.680
ZED 165	56	75	26	157	18	1.772
ZED 180	51	100	26	177	18	1.954
ZED 200	61	100	26	187	18	2.046
ZED 210	66	100	26	192	18	2.091
ZED 230	76	100	26	202	18	2.183
ZED 250	86	100	26	212	18	2.274

NOTE: DIA OF HOLE IS 14MM FOR OVERLAPPED ZED SECTIONS

FOR LIPPED CHANNELS – CLEAT DIMENSIONS

SECTION DEPTH	A	B	C	D	HOLE DIA	WT./ PIECE (KG)
LIP.CH.100	40	40	20	100	18	1.251
LIP.CH.120	50	40	25	115	18	1.388
LIP.CH.140	50	60	25	135	18	1.571
LIP.CH.150	50	70	25	145	18	1.662
LIP.CH.160	55	70	35	160	18	1.799
LIP.CH.170	60	70	35	165	18	1.845
LIP.CH.175	62.5	70	32.5	165	18	1.845
LIP.CH.180	60	80	35	175	18	1.936
LIP.CH.200	70	80	35	185	18	2.027
LIP.CH.210	65	100	35	200	18	2.165
LIP.CH.220	70	100	35	205	18	2.210
LIP.CH.240	55	150	35	240	18	2.530
LIP.CH.250	60	150	35	245	18	2.576
LIP.CH.260	65	150	35	250	18	2.621
LIP.CH.280	75	150	35	260	18	2.713
LIP.CH.300	85	150	35	270	18	2.804